



since 1975



HygienPump

**VARIABLE-FLOW PUMPS
FOR VISCOUS-LIQUID FOOD
AND COSMETIC APPLICATIONS**

FOR PROFESSIONAL AND INDUSTRIAL USE
MANUFACTURED IN CONFORMITY WITH
EUROPEAN COMMUNITY DIRECTIVE 2006/42/EC
AND REGULATION 1935/2004/EC



HygienPump hi-tech

METICULOUS DESIGN IN ACCORDANCE WITH INTERNATIONAL GUIDELINES OF THE FOOD AND COSMETIC SECTOR

AISI 316L Stainless steel, certified materials and carefully polished surfaces. Easy to clean.

Components in contact with fluids are easily detachable by hand without requiring special tools.

OPERATIONAL EFFECTIVENESS, UTMOST RELIABILITY

Manufacturers since 1975 of pneumatic piston pumps designed to handle medium- and high-viscosity fluids. We export to more than 70 countries around the world.




M125/H85

M70/H52S

M70/H52

MODEL	M125/H85	M70/H52S	M70/H52
Compressed-air supply	Up to approximately 6 bar (90/100 psi)	Up to approximately 6 bar (90/100 psi)	Up to approximately 6 bar (90/100 psi)
Compressed-air feed inlet	3/8" Gas	1/4" Gas	1/4" Gas
Maximum output flow rate	Adjustable up to approx. 2400(*)l/h	Adjustable up to approx. 2700(*)l/h	Adjustable up to approx. 2700(*)l/h
Product outlet connection	1 1/2" Tri clamp	1" Tri clamp	1" Tri clamp
Compression ratio	3:1	2:1	2:1
Total length	approx. 1200 mm	approx. 1000 mm	approx. 1500 mm
Length of pumping tube to be submerged	approx. 400 mm	approx. 440 mm	approx. 1000 mm
Weight	26 kg	8.5 kg	10 kg

(*) The flow rate refers to water at 20°C, discharge outlet unobstructed and air supply at 6 bar. The flow rate depends on the viscosity and on the air supply pressure.

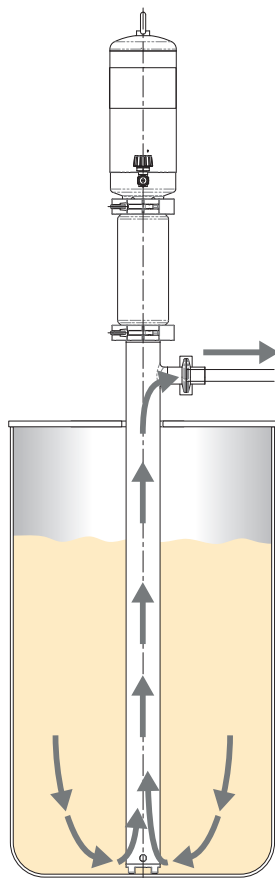

HygienPump



**Viscous fluid pump
manufacturers since 1975.
If you have a problem,
we have the solution!**



EFFECTIVE AND INNOVATIVE MECHANICAL SEALS

SIMPLE, LOW-COST MAINTENANCE

Our 40+ years of activity and continuous quest to satisfy our customers' needs have helped us perfect these important features.


We've adopted new solutions with advanced and exclusive techniques.



SNAP-IN
ASSEMBLY
WITH DOWELS

The pumping part is easy
to disassemble for
component cleaning
or sterilization needs.

CERTIFIED
SPECIAL WELDING
OF STEEL TUBES
WITH NO
FILLER METAL

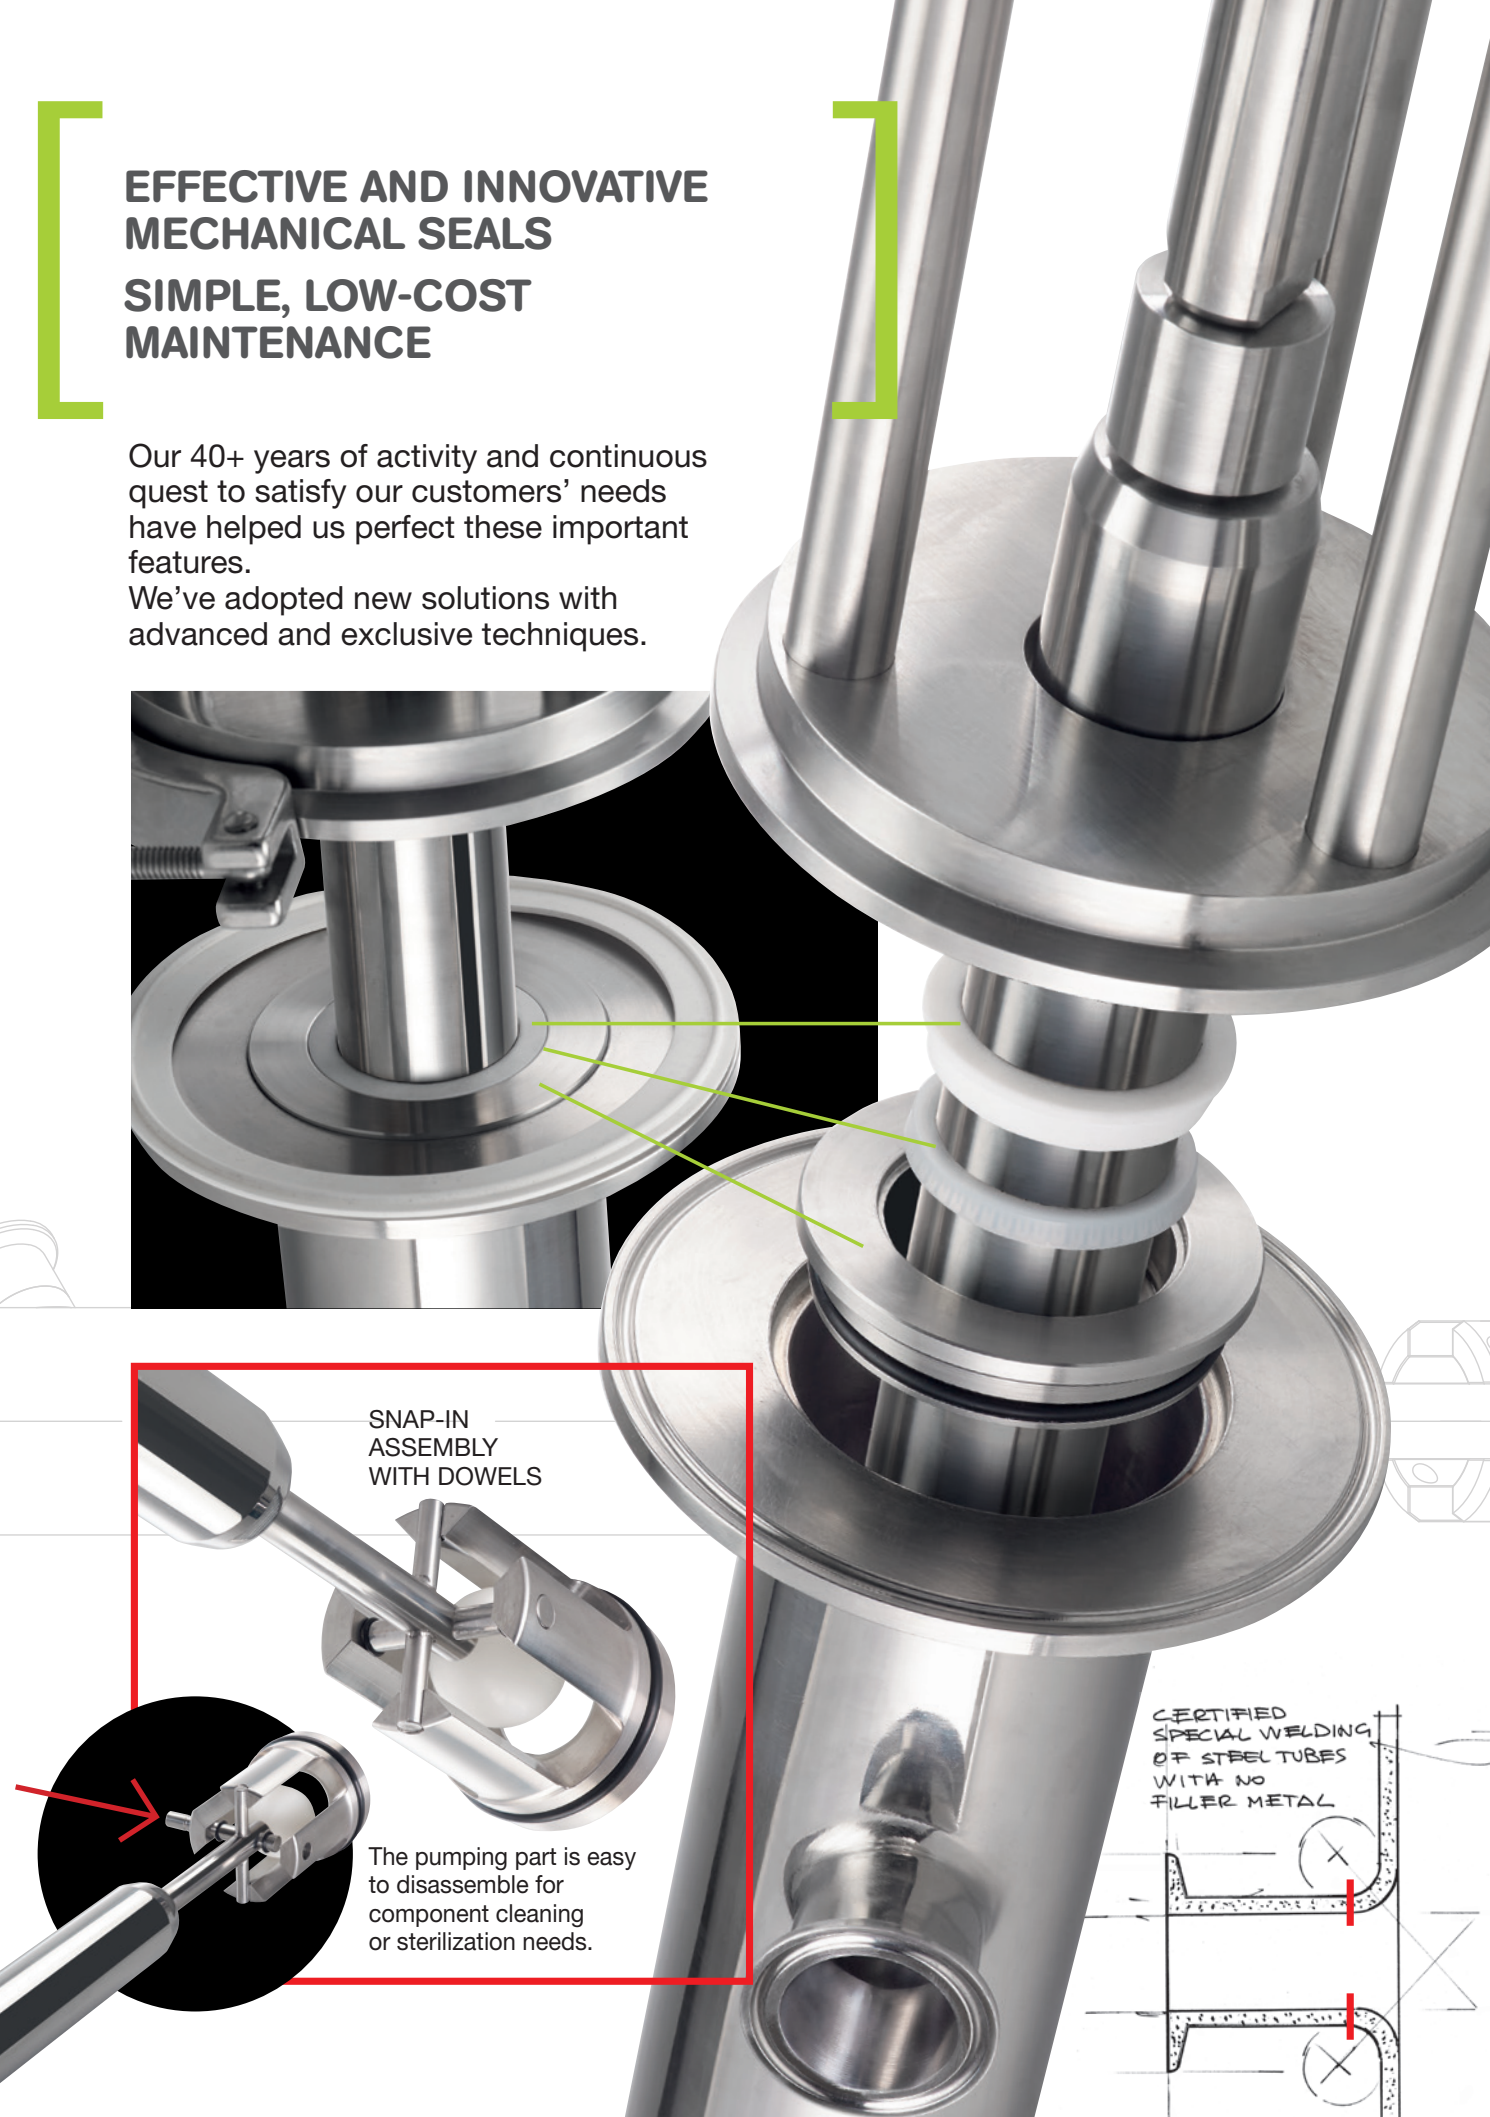

TECHNOLOGY AND SIMPLICITY AT YOUR FINGERTIPS



SIMPLICITY >

EFFICIENCY >


PRECISION >

OPERABILITY >

RELIABILITY >

ROBUSTNESS >

FAST ASSEMBLY
AND DISASSEMBLY

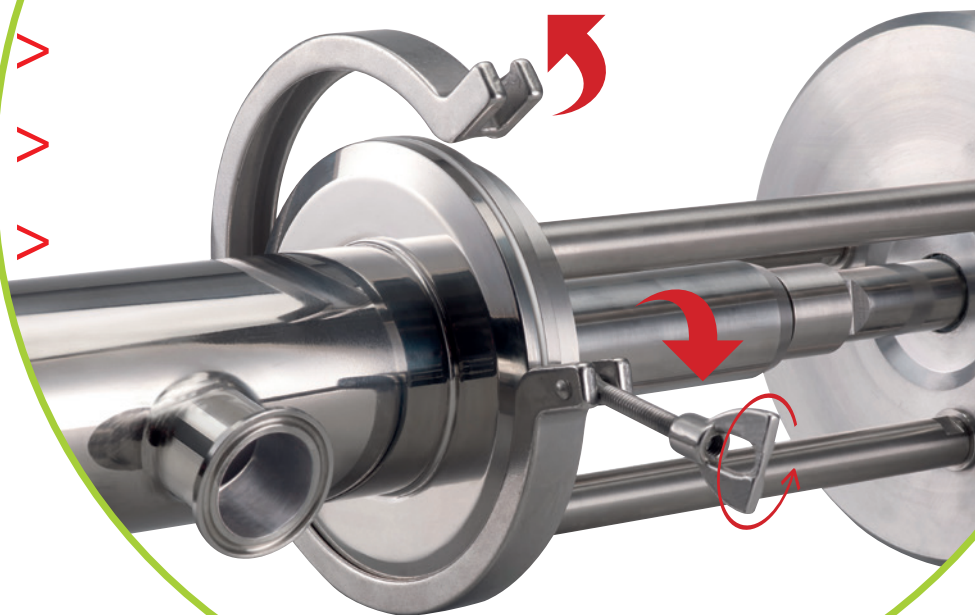

360° SERVICE

THE CUSTOMER THE STARTING AND ENDING POINT

The perception of our Customers' operational needs has contributed to the success of our products. Constant interaction with our Italian and non-domestic customers is the foundation of our continuous growth. Communications are handled with zeal and passion by people who, by virtue of training and tradition, appreciate the importance of the Customer and seek true corporate progress.

QUICK DELIVERY

Standard pump models as well as replacement parts are always ready for delivery and shipped within 24 hours after acceptance of the order. We offer flexibility and the utmost receptiveness to customisation.

CUSTOMER SUPPORT AND REVISION

Customers are supported by an immediate-response telephone and computerised service and by a department specially equipped to recondition any of our pumps without delay at very competitive prices. All operations are subject to Customer approval.

TRACEABILITY

We guarantee the traceability of each pump and manufacturing process to provide greater user safety.



We will be happy to answer any questions you may have

arrow@zp-arrow.com



Z.P. ARROW s.r.l.

Via Giolitti, 15 - 36056 Tezze sul Brenta (VI) Italy

Ph. +39.0424.878080 - Fax +39.0424.878140

www.zp-arrow.com - e-mail: arrow@zp-arrow.com

